




Catalogue of Rental LED panels

<https://www.ledpixelpro.com>
Email: anna@ledpixelpro.com
WhatsApp: +(86)15814094416

Indoor rental series

Indoor rental series

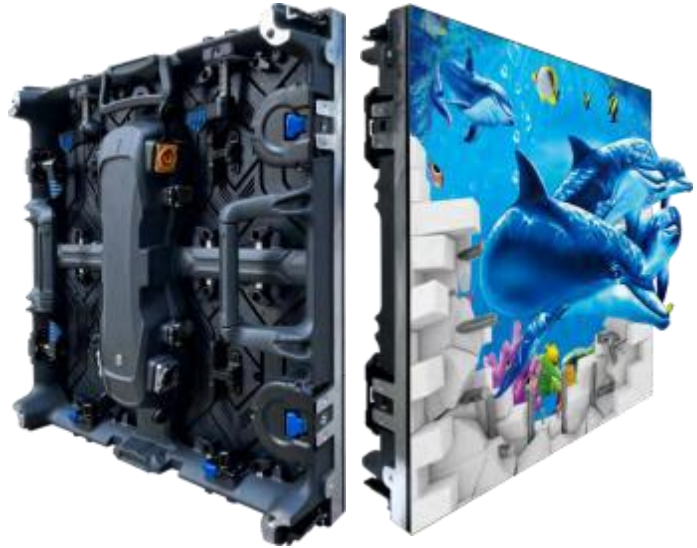

Item	KP2 . 6	KP 2 . 9 7
Pixel pitch	2.604mm	2.976mm
Module size	250*250mm	250*250mm
Module resolution	96×96	84×84
Physical density	147456 dots/m ²	112896 dots/m ²
LED type	SMD2020	SMD2020
Cabinet size	500×500(1000)×84mm	500×500(1000)×84mm
Cabinet resolution	192×192/192×384	168×168/168×336
Cabinet weight	6.8kg(500×500)	13.3kg(500×1000)
Cabinet material	Die casting aluminum	Die casting aluminum
Maintenance way	Front/ Rear	Front/ Rear
Best viewing distance	≥2.6m	≥2.9m
Best viewing angle	H: 160°; V:160°	H: 160°; V:160°
Driving method (Constant Current)	1/32 Scan	1/21 Scan
Video frame rate	≥60 Hz	≥60 Hz
Refresh rate	1920-3840Hz	1920-3840Hz
Brightness	≥800 nits	≥800 nits
Grey Level	12-16 bit	12-16 bit
Ingress protection	IP43	IP43
Average power consumption	240W	240W
Life Time	>100,000 Hours	>100,000 Hours
The rate	<0.0002	<0.0002

Indoor rental series



Item	KP3 . 9 1	KP4 . 8 1
Pixel pitch	3.91mm	4.81mm
Module size	250*250mm	250*250mm
Module resolution	64×64	52×52
Physical density	65536 dots/m ²	43264 dots/m ²
LED type	SMD2020	SMD2020
Cabinet size	500 × 500(1000) × 84mm	500 × 500(1000) × 84mm
Cabinet resolution	128 × 128/ 128 × 256	104 × 104/ 104 × 208
Cabinet weight	6 .8kg(500 × 500)	13 .3kg(500 × 1000)
Cabinet material	Die casting aluminum	Die casting aluminum
Maintenance way	Front/ Rear	Front/ Rear
Best viewing distance	≥3.9m	≥4.8m
Best viewing angle	H: 160°; V:160°	H: 160°; V:160°
Driving method (Constant Current)	1/ 16 Scan,	1/ 13 Scan
Video frame rate	≥60 Hz	≥60 Hz
Refresh rate	1920- 3840Hz	1920- 3840Hz
Brightness	≥800 nits	≥800 nits
Grey Level	12- 16 bit	12- 16 bit
Ingress protection	Ip43	IP43
Average power consumption	240W	240W
Life Time	>100 ,000 Hours	>100 ,000 Hours
The rate	<0 .0002	<0 .0002

Outdoor rental series



Item	KP2 . 6	KP 2 . 9 7
Pixel pitch	2.604mm	2.976mm
Module size	250*250mm	250*250mm
Module resolution	96×96	84×84
Physical density	147456 dots/m ²	112896 dots/m ²
LED type	SMD1415	SMD1415
Cabinet size	500×500(1000)×84mm	500×500(1000)×84mm
Cabinet resolution	192×192/192×384	168×168/168×336
Cabinet weight	7.8kg(500×500)	15.3kg(500×1000)
Cabinet material	Die casting aluminum	Die casting aluminum
Maintenance way	Front/ Rear	Front/ Rear
Best viewing distance	≥2.6m	≥2.9m
Best viewing angle	H: 160°; V:160°	H: 160°; V:160°
Driving method (Constant Current)	1/24 Scan	1/21 Scan
Video frame rate	≥60 Hz	≥60 Hz
Refresh rate	1920-3840Hz	1920-3840Hz
Brightness	≥4500 nits	≥4500 nits
Grey Level	12- 16 bit	12- 16 bit
Ingress protection	IP65	IP65
Average power consumption	360W	360W
Life Time	>100,000 Hours	>100,000 Hours
The rate	<0.0002	<0.0002

Outdoor rental series



Item	KP3 . 9 1	KP4 . 8 1
Pixel pitch	3.91mm	4.81mm
Module size	250*250mm	250*250mm
Module resolution	64×64	52×52
Physical density	65536 dots/m ²	43264 dots/m ²
LED type	SMD1921	SMD1921
Cabinet size	500 × 500(1000) × 84mm	500 × 500(1000) × 84mm
Cabinet resolution	128 × 128/ 128 × 256	104 × 104/ 104 × 208
Cabinet weight	7.8kg(500 × 500)	15.3kg(500 × 1000)
Cabinet material	Die casting aluminum	Die casting aluminum
Maintenance way	Front/ Rear	Front/ Rear
Best viewing distance	≥3.9m	≥4.8m
Best viewing angle	H: 160°; V:160°	H: 160°; V:160°
Driving method (Constant Current)	1/16 Scan,	1/13 Scan
Video frame rate	≥60 Hz	≥60 Hz
Refresh rate	1920-3840Hz	1920-3840Hz
Brightness	≥5000 nits	≥5000 nits
Grey Level	12- 16 bit	12- 16 bit
Ingress protection	IP65	IP65
Average power consumption	360W	360W
Life Time	>100,000 Hours	>100,000 Hours
The rate	<0.0002	<0.0002